

DZ47-63 Mini Circuit Breaker >>>



1.Application

DZ47-63 series circuit breaker is used in lighting distribution system or motor distribution system for protecting overload and short circuit in the system. The product is neoteric in structure light in weight, reliable and excellent in performance .Its frame and parts adopt plastics of high fire resistant and shockproof. The product overload and short circuit protection, as well as for unfrequently switching on&of electric equipment and lighting circuit in normal case. The products comply with IEC60898

2.Specification

Setting temperature of protective characteristics at 400C

Rated Voltage:240V/415V

Rated Current:1,3,6,16,20,25,32,40,50,63A

Electrical life: no less than 6000 operations

Mechanical life:(O-C)on less than 20000

3.Rated making and breaking capacity


DZ47-63(C)

Rated current(A)	Pole number	Voltage(V)	Breaking capacity
1 ~ 40	1P	230	4500
1 ~ 40	2,3,4P	400	4500
50 ~ 60	1P	230	3000
50 ~ 60	2,3,4P	400	3000


DZ47-63(D)

Rated current(A)	Pole number	Voltage(V)	Breaking capacity
1 ~ 60	1P	230	4000
1 ~ 60	2,3,4P	400	4000

4.Characteristic Curve

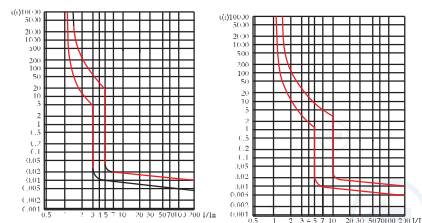

5.Dimensions

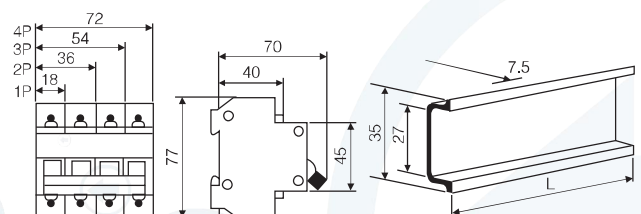

Nonarc
Zhejiang Nonarc Electric CO.,LTD>>>

